



Havoline® ATF III

Automatic Transmission Fluid

Product Data Sheet

Product description

Formulated for applications that call for the former DEXRON®-III H, MERCON®, and Allison C-4 fluids¹.

Customer benefits

Havoline ATF III delivers value through:

- **Protection** against the formation of harmful deposits.
- **Exceptional stability** provided by excellent base oil and extra oxidation inhibitors.
- **Quiet performance** – Especially effective in minimizing transmission “chatter.” Helps ensure smooth, quiet action at all speeds.
- **Fast circulation during cold weather** and excellent lubrication when hot.

Features


Havoline ATF III is a passenger car and light truck automatic transmission fluid for wide range of automatic transmissions built by General Motors, Ford Motor Company and other manufacturers requiring a high-performance, multi-purpose, automatic transmission fluid.

It is formulated with premium, severely hydroprocessed base stocks and additives that helps provide oxidation and thermal stability, friction control, load-carrying ability, corrosion and wear protection. It helps protect against the formation of deposits, sludge, varnish, and foam.

Havoline ATF III helps provide outstanding durability. GM ATF change interval under normal driving conditions is 100,000km for ATF IIIH.

¹ DEXRON is a registered trademark of General Motors Corporation. MERCON is a registered trademark of Ford Motor Company.

A Chevron company product

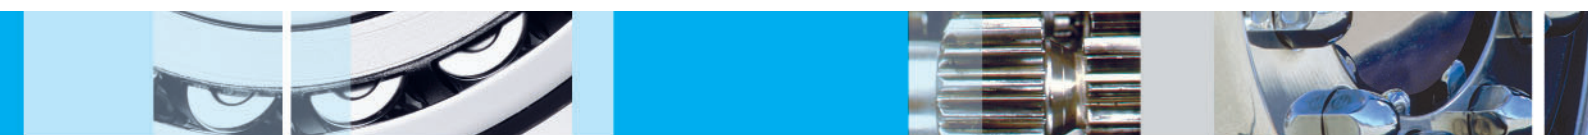

Under severe operating conditions, this fluid:

- Maintains friction control for smooth shift action.
- Is specially formulated to help prevent shudder.
- Retains low temperature fluidity and high temperature stability for long operating periods.
- Protects automatic transmission fluid coolers from corrosion.
- Helps minimize the chances of a transmission overhaul due to sludge, corrosion, and wear.

Applications

Havoline ATF III is designed for use in wide range of automatic transmissions built by General Motors, Ford Motor Company and other manufacturers requiring a high performance, multi-purpose, automatic transmission fluid. It is recommended for:

- Automatic transmissions that call for the former DEXRON-III H, MERCON, and Allison C-4 fluids.
- Power steering units (only where the manufacturer recommends DEXRON®-III, or MERCON® Fluid)

Always check your owners manual to determine the proper automatic transmission fluid for your transmission.

Do not use in high pressure systems in the vicinity of flames, sparks and hot surfaces. Use only in well ventilated areas. Keep container closed.

Do not use in breathing air apparatus or medical equipment.



Havoline® ATF III

Automatic Transmission Fluid

continued

Typical test data

| HAVOLINE ATF III | RESULTS |
|----------------------|---------|
| Product Code | 510143 |
| Density at 15°C | 0.8545 |
| Viscosity, Kinematic | |
| cSt at 40°C | 34.1 |
| cSt at 100°C | 7.0 |
| Viscosity Index | 171 |
| Flash Point, °C | 212 |
| Pour Point, °C | -50 |
| Color | Red |

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by Chevron Lubricants; Africa, Middle East and Pakistan.

Environment, Health and Safety Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit www.caltexoils.com.

For more information, go to www.chevronlubricants.com