



# CLARITY® BIO ELITESYN™ AW

## ISOCLEAN® CERTIFIED LUBRICANT

### 32, 46, 68

#### PRODUCT DESCRIPTION

Clarity® Bio EliteSyn™ AW ISOCLEAN® Certified Lubricants are synthetic renewable, readily biodegradable, high performance hydraulic fluids. They are formulated with ashless technology to provide maximum protection in mobile and stationary hydraulic equipment in industrial and marine applications, including environmental sensitive areas. Clarity Bio EliteSyn AW ISOCLEAN Certified Lubricants meet the requirements of the EPA Vessel General Permit (VGP) for biodegradation, low toxicity, and low bioaccumulation, and are EU Ecolabel approved.



Chevron ISOCLEAN Certified Lubricants have been certified to meet specified ISO Cleanliness standards at point of delivery using industry leading filtration and testing technology. ISOCLEAN Certified products are the first step for contamination control and maximizing component life.

- **Environmentally acceptable** — Meets the requirements of the EPA Vessel General Permit (VGP) for biodegradation, low toxicity and low bioaccumulation.
- **Zinc-free** — Suited for applications involving yellow metals found in axial piston pumps.
- **Excellent performance** — Ashless formulation provides excellent protection against wear of hydraulic pumps, provides rust and corrosion protection, hydrolytic stability, water separability, foam inhibition, and filterability.
- **Outstanding oil life** — Outstanding ability of the synthetic base stock to withstand oxidation at high operating temperatures results in maximum service life for the oil relative to vegetable-based, readily biodegradable products.
- **Excellent low temperature pumpability** — Specifically developed to ensure good low temperature fluidity for low temperature operations.

#### CUSTOMER BENEFITS

Clarity Bio EliteSyn AW ISOCLEAN Certified Lubricants deliver value through:



- **Ready to use** — Enables users to meet stringent original equipment manufacturers' cleanliness standards for fill lubricants.
- **Flexibility** — ISO Cleanliness targets can be customized to fit your business application needs.
- **Peace of mind** — Each delivery of Chevron ISOCLEAN Certified Lubricant includes an ISOCLEAN Certificate of Analysis.
- **OE fluid cleanliness requirements** — Customized to meet specific equipment manufacturers' fluid cleanliness requirements.

Product(s) manufactured in the USA.

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and customer's maintenance practices.

A **Chevron** company product


© 2024-2025 Chevron U.S.A. Inc. All rights reserved.

Chevron, the Chevron Hallmark and Clarity are trademarks owned by Chevron Intellectual Property LLC. All other trademarks are property of their respective owners.

15 November 2025  
IO-28 ISOCLEAN

### FEATURES

Clarity Bio EliteSyn AW ISOCLAN Certified Lubricants are USDA Certified

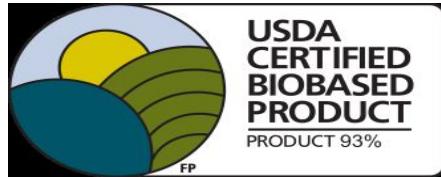

Biobased<sup>1</sup> and made with more than 85% renewable synthetic base stock. These high-performance synthetic lubricants utilize sustainably sourced renewable plant-based feedstocks to produce pure hydrocarbon molecules that may not have any of the impurities found in traditional base oils derived from crude petroleum.

They are readily biodegradable, non-bioaccumulative, and minimally toxic. In the event of a spill, the product biodegrades by more than 60% within 28 days, minimizing the impact to the environment.

These oils are designed to the performance requirements of conventional antiwear hydraulic oils, while providing an additional benefit in case of leaks or incidental discharge to the environment and are approved for use by leading marine stern tube manufacturers.

They give maximum protection in hydraulic equipment used in vessels and in both mobile and stationary hydraulic pumps in high-performance industrial applications.

Clarity® Bio EliteSyn AW ISOCLAN Certified Lubricants are formulated with synthetic base stock and an ashless, zinc-free additive system that provides exceptional oxidation stability, water separability, foam suppression, and protection against wear, rust and corrosion.

The high VI synthetic base stock allows for operation over a wide temperature range and provides excellent low temperature pumpability.

Clarity Bio EliteSyn AW ISOCLAN Certified Lubricants are compatible with nitrile (NBR) and fluoro (FKM) rubber seal materials used in most hydraulic and stern tube systems.

1 The USDA Certified Biobased Product label is a certification mark of the U.S. Department of Agriculture.

### APPLICATIONS

Clarity Bio EliteSyn AW ISOCLAN Certified Lubricants are designed for applications involving:

ISO Grade	32	46	68
mobile and stationary hydraulic vane-, piston-, and gear-type pumps	X	X	X
high performance industrial applications where pressures may exceed 5000 psi	X	X	X
Servo-valves using multi-metal components	X	X	X
Stern tube applications			X

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and customer's maintenance practices.

## CLAIMS AND SPECIFICATIONS

	32	46	68
<b>Parker Hannifin</b> (Dennison) HF-1, HF-6	<b>A</b>	<b>A</b>	<b>A</b>
<b>Danfoss/Eaton</b> E-FDGN-TB002-E	<b>A</b>	<b>A</b>	<b>A</b>
<b>EU Ecolabel</b> BE/027/006	<b>A</b>	<b>A</b>	<b>A</b>
<b>Swedish Standard SS 155434</b>	<b>A</b>	<b>A</b>	<b>A</b>
<b>Kobelco Eagle (KEMEL) Stern Tube</b>	-	-	<b>A</b>
<b>AEGIR Marine Static Compatibility Test</b>	-	-	<b>A</b>
<b>USDA BioPreferred® Program<sup>a</sup></b>	<b>A</b>	<b>A</b>	<b>A</b>
<b>ASTM</b> D8324-21 2013 VGP Compliant (water interfacing)	M	M	M
<b>Fives Cincinnati<sup>b</sup></b> (formerly MAG Cincinnati, Cincinnati Machine, Cincinnati Milacron)	M P-68	M P-70	M P-69
<b>JCMAS</b> HK VG 32, 46	M	M	-
<b>ASTM</b> D6158 HV	M	M	M
<b>DIN</b> 51524-3 HVLP	M	M	M
<b>ISO</b> 11158 L-HV	M	M	M
<b>ISO</b> 15380 HEPR	M	M	M

a BioPreferred is a trademark of the U.S. Department of Agriculture. For more information visit <https://www.biopreferred.gov>.

b Obsolete specification

**A:** Approved for or listed

**M:** Meets or exceeds requirements

Clarity Bio EliteSyn AW ISO CLEAN Certified Lubricants are compatible with nitrile (NBR) and fluoro (FKM) rubber seal materials used in most hydraulic and stern tube systems. They are miscible with common mineral based hydraulic oils, however, they are not compatible with zinc/calcium containing fluids.

Follow good practices, OEM recommended lubricant change-out procedures, including drain and flush requirements, to avoid risk of additive incompatibility and ensure that the full performance benefits are achieved. Compatibility testing should be conducted if Clarity Bio EliteSyn AW is used to top up an existing system.

Please consult with the original equipment manufacturer (OEM) if equipment is operating outside normal operation conditions. Do not use in high pressure systems in the vicinity of flames, sparks, and hot surfaces. Use only in well ventilated areas. Keep container closed. Consult with your Chevron Lubricant Representative or Chevron ISO CLEAN Certified Lubricants Marketer to set specific ISO Cleanliness targets for your business application.

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and customer's maintenance practices.

**TYPICAL TEST DATA**

<b>ISO Grade</b>	<b>Test Method</b>	<b>32</b>	<b>46</b>	<b>68</b>
Product Number		223910	223911	223912
SDS Number				
U.S.		57770	57762	57757
Canada		58449	58452	58467
Mexico		58450	58453	58469
Colombia		58451	58454	58468
API Gravity		40.6	39.7	39.7
Density at 15°C, kg/l	ASTM D4052	0.8223	0.8263	0.8262
Viscosity, Kinematic				
mm <sup>2</sup> /s at 40°C	ASTM D445	31.8	43.7	67.1
mm <sup>2</sup> /s at 100°C		6.5	8.2	11.9
Viscosity, Saybolt				
SUS at 100°F	ASTM D2161	161	212	340
SUS at 210°F		47.9	53.7	67.1
Viscosity Index	ASTM D2770	164	165	175
Flash Point, °C(°F)	ASTM D92	235(455)	252(486)	237(459)
Pour Point, °C(°F)	ASTM D97	-46(-51)	-35(-31)	-41(-42)
Brookfield Viscosity				
cP at -20°C	ASTM 2983	1020	1430	2330
cP at -30°C		2410	4730	7250
Air release at 50°C, minutes	ASTM D3427	2.95	2.18	6.38
Copper Corrosion				
3hr at 100°C	ASTM D130	1b	1a	1a
Rust Test,				
Synthetic Sea Water	ASTM D665B	Pass	Pass	Pass
Oxidation Stability,				
TOST Hours to 2.0 mg KOH/g TAN	ASTM D943	>10,000	>10,000	>10,000
FZG, Fail Load Stage	DIN 51354	12	>12	>12
Biodegradability,				
% in 28 days	OECD 301B	>60	>60	>60
Ecotoxicity				
Algae, 72 h, EC-50, mg/L	OECD 201	>100	>100	>100
Daphnia magna, 48 h, EC-50, mg/L	OECD 202	>100	>100	>100
Fathead minnow, 96 h, LC-50, mg/L	OECD 203	>100	>100	>100

Minor variations in product typical test data are to be expected in normal manufacturing.

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and customer's maintenance practices.