



Havoline® Ezy 4T

High Quality Four-Stroke Motorcycle Oil

Product Data Sheet

Customer benefits

Reliable performance and protection

Effectively lubricates and delivers consistent performance and protection of the motorcycle.

Applications

- Air- and liquid-cooled four-stroke motorcycle engines
- Suitable for older engines that require a thicker oil for added protection against high engine wear
- Motorcycles with back torque limiters
- Motorcycles with exhaust catalytic converters
- Motorcycles with combined engine and transmission units, or separate gearboxes where a multi-grade JASO MA or JASO MA2 engine oil is specified

Product features:

- **Havoline®Ezy 4T** is a mineral oil that offers continuous protection of the engine, gear box, and clutch under all kinds of city riding conditions.

Typical key properties

HAVOLINE® EZY 4T	
SAE Grade	20W-40
Product Code	500709
Base No., D2896, mgKOH/g	6.0
Sulfated Ash, mass %	0.88
Viscosity, mm ² /s @ 40°C	126
mm ² /s @ 100°C	14.6
Phosphorus, mass %	0.09

1707

Performance standards


- JASO MA2 (2011)
JASO Identification Number M065CTP324
- API SG

ENVIRONMENT, HEALTH and SAFETY

Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit: www.caltex.com.

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by:
Chevron Lubricants
Asia Pacific

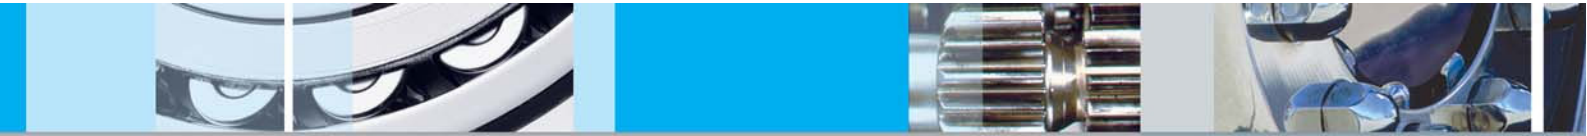

Havoline Ezy 4T

Service Considerations

The JASO MA2 category defines the highest friction motorcycle oils suitable for use in most critical the oil-immersed clutch installations. Oils which meet JASO MA2 also meet in full JASO MA, so may be used wherever JASO MA is specified. JASO allows an oil to be labelled as either JASO MA2 or JASO MA, but not both simultaneously.

Always refer to the vehicle's owners manual to determine the recommended viscosity grades for the engine

ENVIRONMENT, HEALTH and SAFETY

Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit: www.caltex.com.

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by:
Chevron Lubricants
Asia Pacific