



Havoline® Automatic Transmission Fluid MD-3

Product Data Sheet

Customer benefits

Havoline® Automatic Transmission Fluid MD-3 delivers value through:

- **Protection** against the formation of lacquers, sludge, or other harmful deposits.
- **Exceptional stability** provided by premium base oils and extra oxidation inhibitors.
- **Quiet performance** – Especially effective in minimizing transmission “chatter.” Helps ensure smooth, quiet action at all speeds.
- **Fast circulation during cold weather** and excellent film strength when hot.

Features

Havoline Automatic Transmission Fluid MD-3 is a passenger car and light truck automatic transmission fluid for most pre-2006 automatic transmissions built by General Motors, Ford Motor Company and other makes requiring a high-performance, multi-purpose, power transmission fluid.

It is formulated with premium hydroprocessed base stocks and additives that help provide oxidation and thermal stability, friction control, load-carrying ability, corrosion and wear protection. It helps protect against the formation of deposits, sludge, varnish, and foam.

Havoline Automatic Transmission Fluid MD-3 helps provide outstanding durability.

Under severe operating conditions, this fluid:

- Maintains friction control for smooth shift action.
- Is specially formulated to help prevent shudder.
- Retains low temperature fluidity and high temperature stability for long operating periods.
- Protects automatic transmission fluid coolers from corrosion.
- Helps minimize the chances of a transmission overhaul due to sludge, corrosion, and wear.


Product description:

Formulated for applications that call for the former DEXRON®-III H, MERCON®, and Allison C-4 fluids¹.

A Chevron company product

All trademarks are property owned by Chevron Intellectual Property LLC.



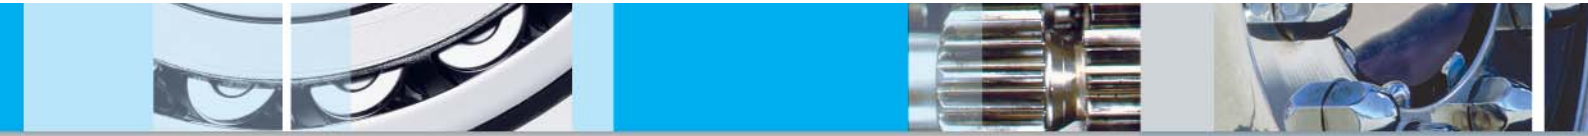

Applications

Havoline Automatic Transmission Fluid MD-3 is designed for use in most pre-2006 automatic transmissions built by General Motors, Ford Motor Company and other makes requiring a high performance, multi-purpose, power transmission fluid. It is recommended for applications that call for the former DEXRON-III H, MERCON, and Allison C-4 fluids.

Always check your owner's manual to determine the proper automatic transmission fluid for your vehicle.

Do not use in high pressure systems in the vicinity of flames, sparks and hot surfaces. Use only in well ventilated areas. Keep container closed.

Do not use in breathing air apparatuses or medical equipment.

¹ DEXRON is a registered trademark of General Motors Corporation.
MERCON is a registered trademark of Ford Motor Company.



Havoline® Automatic Transmission Fluid MD-3

continued

Typical test data

HAVOLINE AUTOMATIC TRANSMISSION FLUID MD-3	RESULTS
Product Code	510145
API Gravity	33.4
Viscosity, Kinematic	
cSt at 40°C	34.1
cSt at 100°C	7.0
Viscosity Index	171
Flash Point, °C(°F)	212 (414)
Pour Point, °C(°F)	-50 (-58)
Color	Red

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by Chevron Lubricants; Africa, Middle East and Pakistan.

Environment, Health and Safety Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit www.caltexoils.com.

For more information, go to www.chevronlubricants.com