



# Regal<sup>®</sup> HTO (formerly Texatherm)

## Industrial heat transfer oil

Product Data Sheet

### Product description

Regal HTO is a proven performance highly refined, thermally stable paraffinic petroleum oil, formulated for use as an industrial heat transfer fluid for closed and open heat transfer systems with forced circulation.

### Customer benefits

- Formulated to promote energy efficient heat transfer performance
- Oxidation and thermal stability helps resist harmful sludge and coke formation and contributes to long oil service life
- Low temperature fluidity assists rapid system start-up
- Low vapour pressure at elevated temperatures helps minimise evaporation, vapour lock and pump cavitation
- Efficient low pressure operation avoids the need for expensive high pressure pipe-work and heat exchanger systems

### Applications

- May be used in heat transfer systems in industrial drying applications, rubber and plastics manufacture, heating of asphalt and fuel oil tanks, food processing, cooking and canning, factory heating, manufacture of soap, resin, glue, dyes, paints, pharmaceuticals and grease, wood laminate, fibre board and veneer manufacture, agricultural heating and drying, and chemical, petroleum and wax processing
- Maximum bulk oil temperature 288°C
- Maximum film temperature on heater surfaces 316°C
- Maximum temperature of oil surface in contact with air in open systems 107°C
- Systems must have forced circulation of the heat transfer fluid.

### Product features:

- Promotes energy efficient heat transfer
- Helps prevent harmful sludge and coke formation
- Assists rapid system start-up
- Aids efficient low pressure operation

A **Chevron** company product

continued

## Typical test data

REGAL® HTO	TEST METHOD	RESULTS		
		520086	520091	520064
<b>Product Number</b>	<b>ASTM</b>	<b>VG 32</b>	<b>VG 46</b>	<b>VG 68</b>
<b>Characteristic</b>				
<b>Kinematic viscosity</b> at 40°C, mm <sup>2</sup> /s	D445	32.0	44.7	67.9
<b>Viscosity Index</b>	D2270	108	112	110
<b>Density at 15°C, kg/l</b>	D4052	0.86	0.864	0.865
<b>Flash Point COC, °C</b>	D92	>200	>200	256
<b>Pour Point, °C</b>	D97	-15	-15	-20
<b>Air release at 50°C, min.</b>	D3427	2.3	2.3	6.9
<b>TAN, mg KOH/g</b>	D974	0.08	0.1	0.1
<b>Foam Seq II, after blowing, ml</b>	D892	0	0	30
<b>Foam Seq II, after 10 minutes, ml</b>	D892	0	0	0
<b>Demulsibility at 54°C, min.</b>	D1401	40-40-0(15)	40-40-0(10)	40-40-0(10)

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by Chevron Global Lubricants: Africa, Middle East and Pakistan

A **Chevron** company product



*continued*

## Service considerations

Certain precautions should be taken to ensure satisfactory performance of heat transfer fluids in service:

### System Cleanliness

The heat transfer system, whether new or used, should be thoroughly cleaned and flushed with Regal HTO before being placed in service. Sometimes this cleaning will require the use of chemical cleaners, usually in the form of an alkaline cleaning agent. These products are supplied, and are usually applied, by specialist industrial cleaning companies. In use they are often mixed with very hot water and pumped continuously through the system to remove deposits. If such chemical cleaners mixed with water are used, all traces of water and the cleaner must be removed from the system prior to it being brought back into service. Hot air blowing will usually successfully remove residual water.

### Heat Transfer System Materials

Iron and steel are the preferred materials for heating system construction. Copper and copper alloys should not be used in heat transfer systems with a hydrocarbon fluid unless air (oxygen) is excluded from contact with the fluid by hermetic sealing and/or an inert gas “blanket”.

The heater should be constructed with a minimum of refractory to improve thermal response, and to reduce heat-soak into the fluid in case of pump failure.


### System Seal

Hot heat transfer fluid must be prevented from contacting the air in the expansion tank since air will cause rapid oxidation. To accomplish this, the expansion tank should be located and piped so that fluid in it remains cool (below 55°C).

### Hot Spots

The system should be free of hot spots which will degrade the fluid and cause the formation of hard carbon deposits on the system surfaces. The fluid should be circulated through the heater with a fully turbulent flow, with a surface speed between 2 and 3 metres per second, depending on surface geometry and operating temperature. The system should be designed so that:

1. The circulating pump is started before heat is applied to the heater
2. The circulating pump runs for some time after the heater is turned off
3. The heater will shut off in the event of circulating pump failure or the development of excessive temperatures.

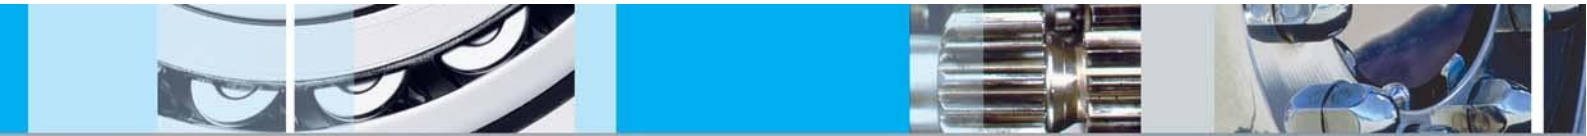

*continued*

Full fluid flow must always be maintained through the heater, regardless of the conditions at the heat exchanger. The system should be designed for the bypass of fluid at the heat exchanger if the full fluid flow is not required there. This will ensure that full fluid flow is retained at the heater.

### **In-Service Oil Testing**

The viscosity, acid number, flash point and insolubles content of the in-service fluid should be monitored regularly. Samples should be taken within a few days of start-up, and every six months afterward. Generally, it is the rate of change of in-service fluid properties which indicates the suitability of the fluid for further service.

Environment, Health and Safety Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit [www.caltexoils.com](http://www.caltexoils.com).

**For more information, go to [www.chevronlubricants.com](http://www.chevronlubricants.com)**

A Chevron company product  
All trademarks are property owned by Chevron Intellectual Property LLC.

REGAL-HTO/MEA/PDSv2\_110624  
© 2024 Chevron Lubricants; Africa, Middle East and Pakistan. All Rights Reserved.